

FAG


22226-E1-XL-K-C3

Spherical Roller Bearing

Spherical roller bearings 222...-E1-K, main dimensions to DIN 635-2, with tapered bore, taper 1:12

X-life

Informacje techniczne

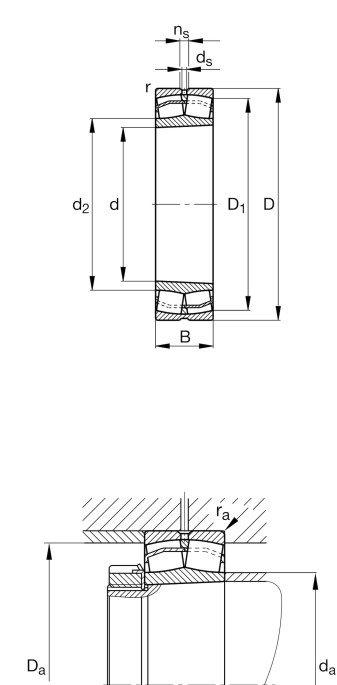

Twoja aktualna wersja produktu

Design	E1	Without central rip
Bore type	K	Tapered, taper 1:12
Cage	JPA	Sheet metal cage
Radial internal clearance	C3 (Group 3)	Internal clearance larger than CN
Relubrication feature	Standard	

Main Dimensions & Performance Data

d	130 mm	Bore diameter
D	230 mm	Outside diameter
B	64 mm	Width
C _r	760.000 N	Basic dynamic load rating, radial
C _{0r}	890.000 N	Basic static load rating, radial
C _{ur}	81.000 N	Fatigue load limit, radial
n _G	3.350 1/min	Limiting speed
n _{gr}	2.500 1/min	Reference speed

≈m	10,755 kg	Masa
----	-----------	------



Mounting dimensions

$d_{a \min}$	144 mm	Minimum diameter shaft shoulder
$d_{a \max}$	151 mm	Maximum diameter of shaft shoulder
$D_{a \max}$	216 mm	Maximum diameter of housing shoulder
$r_{a \max}$	2,5 mm	Maximum recess radius
$d_{b \min}$	138 mm	Minimum cavity diameter of the sleeve
$B_{a \min}$	8 mm	Minimum cavity width of the sleeve

Dimensions

$r_{\min}$	3 mm	Minimum chamfer dimension
D_1	205 mm	Bore diameter outer ring
d_2	151,7 mm	Raceway diameter of the inner ring
d_s	6,3 mm	Diameter lubrication hole
n_s	12,2 mm	Width of lubricating groove

Temperature range

$T_{\min}$	-30 °C	Operating temperature min.
$T_{\max}$	200 °C	Operating temperature max.

Calculation factors

e	0,26	Limiting value of F_a/F_r for the applicability of diff. Values of factors X and Y
Y_1	2,62	Dynamic axial load factor
Y_2	3,9	Dynamic axial load factor
Y_0	2,56	Static axial load factor

Additional information

H3126	Adapter sleeve
AHX3126	Withdrawal sleeve



Właściwości



Obciążenie promieniowe



Obciążenie osiowe jednokierunkowe



Obciążenie osiowe dwukierunkowe



Smarowanie smarem



Smarowanie olejem



Bez uszczelnienia



Nieosiowość statyczna



Nieosiowość dynamiczna