

FAG


24126-BE-XL-K30-C3

Spherical Roller Bearing

Spherical roller bearings 241...-BE-K30, main dimensions to DIN 635-2, with tapered bore, taper 1:30

X-life

Informacje techniczne

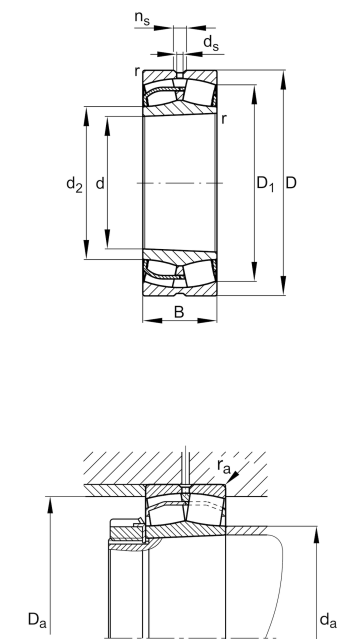

Twoja aktualna wersja produktu

Design	BE	With lose center lip ring
Bore type	K30	Tapered, taper 1:30
Cage	JPB	Sheet metal cage
Radial internal clearance	C3 (Group 3)	Internal clearance larger than CN
Relubrication feature	Standard	

Main Dimensions & Performance Data

d	130 mm	Bore diameter
D	210 mm	Outside diameter
B	80 mm	Width
C _r	710.000 N	Basic dynamic load rating, radial
C _{0r}	1.050.000 N	Basic static load rating, radial
C _{ur}	112.000 N	Fatigue load limit, radial
n _G	2.800 1/min	Limiting speed
n _{gr}	1.560 1/min	Reference speed
≈m	10,4 kg	Masa



Mounting dimensions

$d_{a\ min}$	141 mm	Minimum diameter shaft shoulder
$D_{a\ max}$	199 mm	Maximum diameter of housing shoulder
$r_{a\ max}$	2 mm	Maximum recess radius

Dimensions

$r_{\ min}$	2 mm	Minimum chamfer dimension
D_1	181,2 mm	Bore diameter outer ring
d_2	148,3 mm	Raceway diameter of the inner ring
d_s	3,2 mm	Diameter lubrication hole
n_s	6,5 mm	Width of lubricating groove

Temperature range

$T_{\ min}$	-30 °C	Operating temperature min.
$T_{\ max}$	200 °C	Operating temperature max.

Calculation factors

e	0,34	Limiting value of F_a/F_r for the applicability of diff. Values of factors X and Y
Y_1	1,98	Dynamic axial load factor
Y_2	2,94	Dynamic axial load factor
Y_0	1,93	Static axial load factor

Additional information

AH24126	Withdrawal sleeve
---------	-------------------



Właściwości

-  Obciążenie promieniowe
-  Obciążenie osiowe jednokierunkowe
-  Obciążenie osiowe dwukierunkowe
-  Smarowanie smarem
-  Smarowanie olejem
-  Bez uszczelnienia
-  Nieosiowość statyczna
-  Nieosiowość dynamiczna