
**FAG****B71918-C-T-P4S-UL** 

## Spindle bearing

Spindle bearing B719...-C, adjusted, in pairs or sets, contact angle  $\alpha = 15^\circ$ , restricted tolerances

## Informacje techniczne





## Twoja aktualna wersja produktu

|                         |         |                                                                  |
|-------------------------|---------|------------------------------------------------------------------|
| Preload class           | L       | Preload light                                                    |
| Contact angle           | C       | Contact angle $15^\circ$                                         |
| Tolerance class         | P4S     | Tolerance class P4S, FAG standard better than P4 to ISO 492:2023 |
| Type of Seal            | Without | Not sealed                                                       |
| Cage                    | T       | Laminated fabric cage                                            |
| Arrangement bearing set | U       | Single bearing                                                   |

## Main Dimensions &amp; Performance Data

|                        |              |                                       |
|------------------------|--------------|---------------------------------------|
| d                      | 90 mm        | Bore diameter                         |
| D                      | 125 mm       | Outside diameter                      |
| B                      | 18 mm        | Width                                 |
| $C_r$                  | 48.000 N     | Basic dynamic load rating, radial     |
| $C_{0r}$               | 35.000 N     | Basic static load rating, radial      |
| $C_{ur}$               | 3.550 N      | Fatigue load limit, radial            |
| $n_{G \text{ Grease}}$ | 11.000 1/min | Limiting speed for grease lubrication |
| $n_{G \text{ Oil}}$    | 16.000 1/min | Limiting speed for oil lubrication    |
| $\approx m$            | 0,546 kg     | Masa                                  |

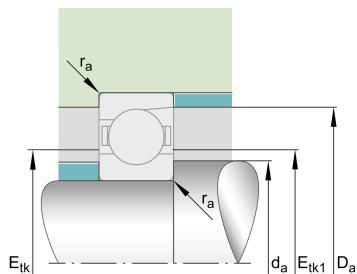



Mounting dimensions

|                      |          |                                                   |
|----------------------|----------|---------------------------------------------------|
| d <sub>a</sub>       | 97 mm    | Diameter shaft shoulder                           |
| d <sub>a</sub>       | h12      | Diameter shaft shoulder clearance                 |
| D <sub>a</sub>       | 119 mm   | Shoulder diameter outer ring                      |
| D <sub>a</sub>       | H12      |                                                   |
| r <sub>a</sub> max   | 0,6 mm   | Maximum recess radius                             |
| r <sub>a1</sub> max  | 0,6 mm   | Maximum recess radius                             |
| E <sub>tk</sub> min  | 100,9 mm | Minimum diameter injection pitch                  |
| E <sub>tk</sub> max  | 104,3 mm | Maximum diameter injection pitch                  |
| E <sub>tk1</sub> min | 100,9 mm | Minimum diameter injection pitch                  |
| E <sub>tk1</sub> max | 104,3 mm | Maximum diameter injection pitch                  |
| a                    | 23,4 mm  | Distance between the apexes of the pressure cones |

Dimensions

|                    |        |                           |
|--------------------|--------|---------------------------|
| r <sub>min</sub>   | 1,1 mm | Minimum chamfer dimension |
| r <sub>1</sub> min | 1,1 mm | Minimum chamfer dimension |
| α                  | 15 °   | Contact angle             |

Temperature range

|                  |        |                            |
|------------------|--------|----------------------------|
| T <sub>min</sub> | -30 °C | Operating temperature min. |
| T <sub>max</sub> | 100 °C | Operating temperature max. |



Additional information

|           |                |                       |
|-----------|----------------|-----------------------|
| $F_{VL}$  | 238 N          | Preload force light   |
| $F_{VM}$  | 796 N          | Preload force medium  |
| $F_{VH}$  | 1.615 N        | Preload force heavy   |
| $K_{aEL}$ | 729 N          | Lift-off force light  |
| $K_{aEM}$ | 2.628 N        | Lift-off force medium |
| $K_{aEH}$ | 5.691 N        | Lift-off force heavy  |
| $c_{aL}$  | 82 N/ $\mu$ m  | Axial rigidity light  |
| $c_{aM}$  | 140 N/ $\mu$ m | Axial rigidity medium |
| $c_{aH}$  | 200 N/ $\mu$ m | Axial rigidity heavy  |

Właściwości

- 

Obciążenie promieniowe
- 

Obciążenie osiowe jednokierunkowe
- 

Smarowanie smarem
- 

Smarowanie olejem
- 

Bez uszczelnienia