




GLCTEY30

Flanged housing unit

Flanged housing unit GLCTEY

Informacje techniczne

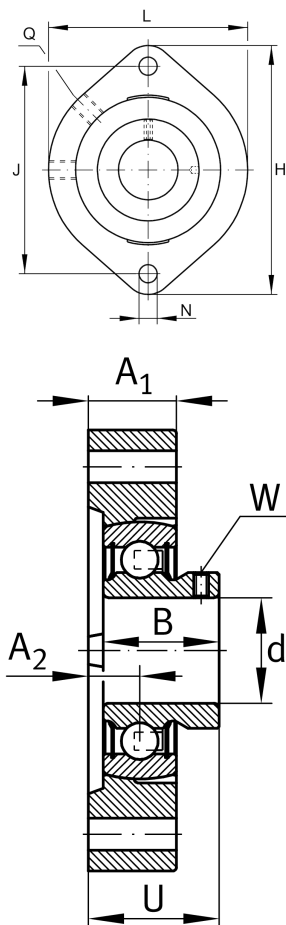

Twoja aktualna wersja produktu

Material	GG	Grey cast iron
----------	----	----------------

Main Dimensions & Performance Data

d	30 mm	Bore diameter
L	84 mm	Flange width
H	112,5 mm	Height flange
U	32,4 mm	Total height unit
C _r	19.500 N	Basic dynamic load rating, radial
C _{0r}	11.300 N	Basic static load rating, radial
≈m	0,69 kg	Masa

Mounting dimensions

J	90,5 mm	Distance fixing bore
N	11,5 mm	Fixing bore
n	2	Number of screwing holes

Dimensions

A ₁	22,5 mm	Thickness of flange
A ₂	11,4 mm	Distance raceway
B	30 mm	Width
Q	M6	Connection thread for lubrication



Additional information

GEHGLCTE06-GG	Housing
GAY30-XL-NPP-B	Bearing designation

Temperature range

T _{min}	-20 °C	Operating temperature min.
T _{max}	100 °C	Operating temperature max.