


**KB40-PP-AS**

Linear Ball Bearing

Linear ball bearings KB...-PP-AS, machined range, sealed on all sides, with relubrication facility, corrosion-resistant design possible

Informacje techniczne

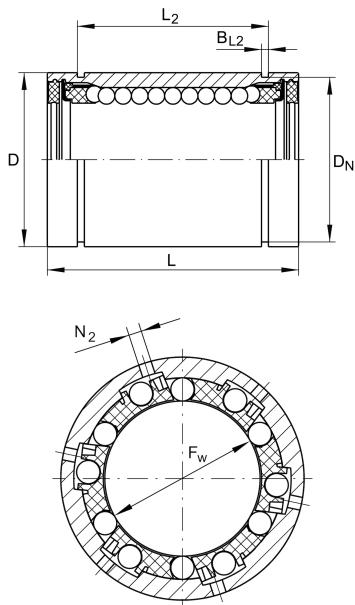

Twoja aktualna wersja produktu

Size 40

Main Dimensions & Performance Data

|                    |               |                     |
|--------------------|---------------|---------------------|
| F <sub>W</sub>     | 40 mm         | Bore diameter       |
|                    | +0,013/-0,002 | Tolerance           |
| D                  | 62 mm         | Outside diameter    |
|                    | h5            | Tolerance           |
| L                  | 80 mm         | Length              |
|                    | h12           | Tolerance           |
| C <sub>min</sub>   | 6.000 N       | Load capacity dyn.  |
| C <sub>0 min</sub> | 4.400 N       | Load capacity stat. |
| C <sub>max</sub>   | 6.400 N       | Load capacity dyn.  |
| C <sub>0 max</sub> | 5.600 N       | Load capacity stat. |
| ≈m                 | 0,599 kg      | Masa                |

Mounting dimensions

|                 |         |                      |
|-----------------|---------|----------------------|
| L <sub>2</sub>  | 60,3 mm |                      |
|                 | H13     | Tolerance            |
| B <sub>L2</sub> | 2,15 mm |                      |
| D <sub>N</sub>  | 59 mm   |                      |
| N <sub>2</sub>  | 3 mm    |                      |
|                 | 6       | Number of rows balls |