FAG

LOE312-N-AL-L

Plummer block housing

Plummer block housing, split, for spherical roller bearings, oil-lubrication

Informacje techniczne

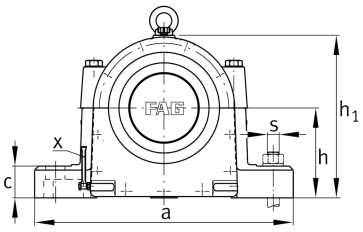

Main Dimensions & Performance Data

d	60 mm	Shaft diameter
a	370 mm	Length base
h_1	220 mm	Height
g_1	220 mm	Total width
≈m	37 kg	Masa

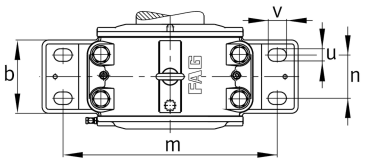

Dimensions

b	130 mm	Width base
c	45 mm	Heigth base
D	130 mm	Outside diameter bearing
d_2	65 mm	Shaft diameter shoulder
d_5	M60X2	Thread shaft nut
g	140 mm	Width housing body
g_3	18 mm	Wall thickness
h	125 mm	Center heigth
m	310 mm	Distance fixing bore
n	80 mm	Bore distance width
s	M16	Size of fixing screws
u	20 mm	Width slot
v	30 mm	Length slot
w	55 mm	Location collar width

Karta katalogowa jest jedynie przeglądem wymiarów i podstawowych nośności wybranego produktu. Zawsze należy stosować się do wszystkich dalszych informacji i instrukcji dotyczących tego produktu. Na naszej stronie internetowej znajduje się formularz kontaktowy umożliwiający wysłanie zapytania o dalsze informacje

Additional information

	1 l	Oil quantity first filling
	65 mm	Maximum height oil level
	50 mm	Minimum height oil level

Temperature range

T_{min}	-20 °C	Operating temperature min.
T_{max}	100 °C	Operating temperature max.

Karta katalogowa jest jedynie przeglądem wymiarów i podstawowych nośności wybranego produktu. Zawsze należy stosować się do wszystkich dalszych informacji i instrukcji dotyczących tego produktu. Na naszej stronie internetowej znajduje się formularz kontaktowy umożliwiający wysłanie zapytania o dalsze informacje