




FAG

N319-E-XL-M1 [🔗](#)

Cylindrical roller bearing

Cylindrical roller bearing N3..-E-M1, with cage, single row, non-locating bearing, 0 ribs on outer ring, 2 rib on inner ring, type N3

Informacje techniczne

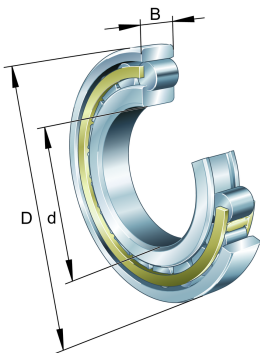

Twoja aktualna wersja produktu

Cage	M1	Two Piece Brass Cage Roller Guided
Tolerance class	PN	Normal (ISO 492:2023)
Change mark	E	Increased Capacity Design
Radial internal clearance	CN (Group N)	Normal internal clearance
Number of rows	1	Single-row design

Main Dimensions & Performance Data

d	95 mm	Bore diameter
D	200 mm	Outside diameter
B	45 mm	Width
C _r	390.000 N	Basic dynamic load rating, radial
C _{0r}	380.000 N	Basic static load rating, radial
C _{ur}	65.000 N	Fatigue load limit, radial
n _{G Grease}	5.200 1/min	Limiting speed for grease lubrication
n _{G Oil}	6.100 1/min	Limiting speed for oil lubrication
≈m	6,9 kg	Masa

Mounting dimensions

d _a	109 mm	Diameter shaft shoulder
D _a	186 mm	Diameter of housing shoulder
r _{a1 max}	2,5 mm	Maximum recess radius



Dimensions

$r_{1\min}$	3 mm	Minimum chamfer dimension
s_1	1,4 mm	Axial displacement
E	177,5 mm	Raceway diameter outer ring

Temperature range

$T_{\min}$	-30 °C	Operating temperature min.
$T_{\max}$	150 °C	Operating temperature max.

Właściwości

-  Obciążenie promieniowe
-  Smarowanie smarem
-  Smarowanie olejem
-  Bez uszczelnienia