



NA6910-ZW-S3-XL-C4

Needle roller bearing

Needle roller bearings NA69...ZW, Dimension series 69, double row

X-life

Informacje techniczne

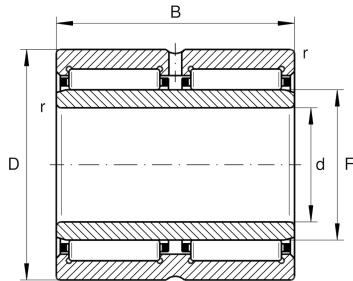

Twoja aktualna wersja produktu

Cage	Standard	
Cage feature	Standard	
Radial internal clearance	C4 (Group 4)	Internal clearance larger than C3
Number of rows	ZW	Double-row design

Main Dimensions & Performance Data

d	50 mm	Bore diameter
D	72 mm	Outside diameter
B	40 mm	Width
C _r	67.000 N	Basic dynamic load rating, radial
C _{0r}	139.000 N	Basic static load rating, radial
C _{ur}	19.400 N	Fatigue load limit, radial
n _G	7.800 1/min	Limiting speed
n _{gr}	4.200 1/min	Reference speed

Dimensions

F	58 mm	Raceway diameter inner ring
r _{min}	0,6 mm	Minimum chamfer dimension
s	0,5 mm	Axial displacement



Temperature range

T_{min}	-30 °C	Operating temperature min.
T_{max}	300 °C	Operating temperature max.

Właściwości

-  Obciążenie promieniowe
-  Smarowanie smarem
-  Smarowanie olejem
-  Bez uszczelnienia
-  Mała przestrzeń zabudowy