**NA6914-ZW-XL** [🔗](#)

Needle roller bearing

Needle roller bearings NA69...ZW, Dimension series 69, double row

X-life

Informacje techniczne

Twoja aktualna wersja produktu



Cage	Standard	
Cage feature	Standard	
Special features	Standard	
Number of rows	ZW	Double-row design

Main Dimensions & Performance Data

d	70 mm	Bore diameter
D	100 mm	Outside diameter
B	54 mm	Width
C _r	145.000 N	Basic dynamic load rating, radial
C _{0r}	265.000 N	Basic static load rating, radial
C _{ur}	48.000 N	Fatigue load limit, radial
n _G	5.700 1/min	Limiting speed
n _{gr}	3.300 1/min	Reference speed
≈m	1,34 kg	Masa

Dimensions

F	80 mm	Raceway diameter inner ring
r _{min}	1 mm	Minimum chamfer dimension
s	1 mm	Axial displacement

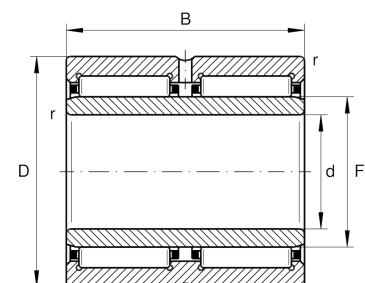



Temperature range

$T_{\min}$	-30 °C	Operating temperature min.
$T_{\max}$	120 °C	Operating temperature max.

Właściwości

-  Obciążenie promieniowe
-  Smarowanie smarem
-  Smarowanie olejem
-  Bez uszczelnienia
-  Mała przestrzeń zabudowy