



**PCFT30-XL**

Flanged housing unit

Housing units PCFT, two-bolt flanged housing units, cast iron, eccentric locking collar, P seals

X-life

Informacje techniczne

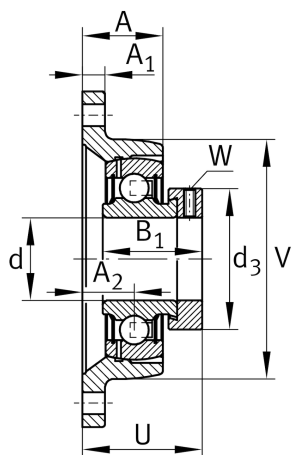

Twoja aktualna wersja produktu

Material	GG	Grey cast iron
----------	----	----------------

Main Dimensions & Performance Data

d	30 mm	Bore diameter
L	80 mm	Flange width
H	142 mm	Height flange
U	40 mm	Total height unit
C _r	20.700 N	Basic dynamic load rating, radial
C _{0r}	11.300 N	Basic static load rating, radial
C _{ur}	480 N	Fatigue load limit, radial
≈m	0,77 kg	Masa

Mounting dimensions

J	116,5 mm	Distance fixing bore
N	11,5 mm	Fixing bore
n	2	Number of screwing holes



Dimensions

A	22,3 mm	Height housing
A ₁	12 mm	Thickness of flange
A ₂	13,3 mm	Distance raceway
V	80 mm	Shoulder diameter housing
Q	M6	Connection thread for lubrication
d ₃	44 mm	Outside diameter locking collar

Additional information

1	Number of housings
CFT06	Housing
GRAE30-XL-NPP-B	Bearing designation

Temperature range

T _{min}	-20 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.