

PSHEY25-XL-N

Plummer block housing unit

Plummer block housing units PSHEY, cast iron housing, radial insert ball bearing with grub screws in inner ring, P seals

X-life

Informacje techniczne



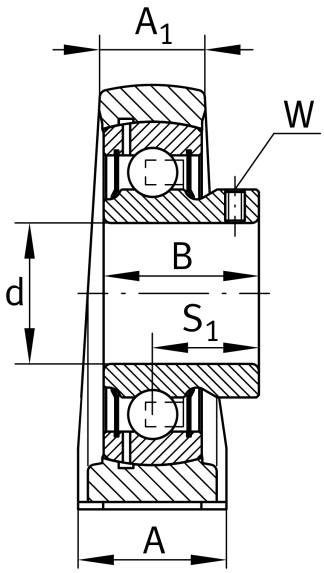

Twoja aktualna wersja produktu

Groove	N	Cast iron housing with undercut slot for end caps
Material	GG	Grey cast iron

Main Dimensions & Performance Data

d	25 mm	Bore diameter
L	70 mm	Length total
H_2	70 mm	Height
≈m	0,51 kg	Masa

Mounting dimensions

J	50,8 mm	Distance fixing bore
K	M10	Thread fixing bore

Dimensions

H	36,5 mm	Distance shaft axis
A	36 mm	Width (base)
A_1	21 mm	Width (head)
Q	M6	Connection thread for lubrication
S_1	19,5 mm	Distance of raceway to locking collar

Karta katalogowa jest jedynie przeglądem wymiarów i podstawowych nośności wybranego produktu. Zawsze należy stosować się do wszystkich dalszych informacji i instrukcji dotyczących tego produktu. Na naszej stronie internetowej znajduje się formularz kontaktowy umożliwiający wysłanie zapytania o dalsze informacje

Additional information

	SHE05	Housing
	GAY25-XL-NPP-B	Bearing designation
	KASK05	Protecting cap

Temperature range

T_{min}	-20 °C	Operating temperature min.
T_{max}	120 °C	Operating temperature max.

Karta katalogowa jest jedynie przeglądem wymiarów i podstawowych nośności wybranego produktu. Zawsze należy stosować się do wszystkich dalszych informacji i instrukcji dotyczących tego produktu. Na naszej stronie internetowej znajduje się formularz kontaktowy umożliwiający wysłanie zapytania o dalsze informacje