RALT20-XL-FA125.8

Flanged housing unit

Flanged housing unit RALT..-XL

X-life

Informacje techniczne



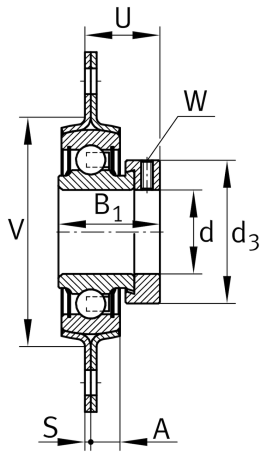

Twoja aktualna wersja produktu

Material	Steel sheet	
Manufacturing instruction	FA125.8	Housing with Corrotect coating

Main Dimensions & Performance Data

L	58,7 mm	Flange width
H	81 mm	Height flange
U	20,46 mm	Total height unit
$C_{0r\ G}$	2.700 N	Load carrying capacity (housing)
C_g	2.700 N	Load carrying capacity (housing)
≈m	0,17 kg	Masa

Mounting dimensions

J	63,5 mm	Distance fixing bore

Dimensions

A	7 mm	Height housing
S_1	2 mm	Thickness of flange
S	2 mm	Thickness of flange
V	48 mm	Shoulder diameter housing

Karta katalogowa jest jedynie przeglądem wymiarów i podstawowych nośności wybranego produktu. Zawsze należy stosować się do wszystkich dalszych informacji i instrukcji dotyczących tego produktu. Na naszej stronie internetowej znajduje się formularz kontaktowy umożliwiający wysłanie zapytania o dalsze informacje

Additional information

	2	Number of housings
	FLAN42-LST	Housing
	RALE20-XL-NPP-B	Bearing designation

Temperature range

T_{min}	-20 °C	Operating temperature min.
T_{max}	120 °C	Operating temperature max.

Karta katalogowa jest jedynie przeglądem wymiarów i podstawowych nośności wybranego produktu. Zawsze należy stosować się do wszystkich dalszych informacji i instrukcji dotyczących tego produktu. Na naszej stronie internetowej znajduje się formularz kontaktowy umożliwiający wysłanie zapytania o dalsze informacje