SL1818/950-E-TB-C3

Cylindrical roller bearing

Cylindrical roller bearing, SL1818..-E-TB full complement roller set, single row, semi-locating bearing, 1 rib on outer ring, 2 ribs on inner ring, type SL18

Informacje techniczne



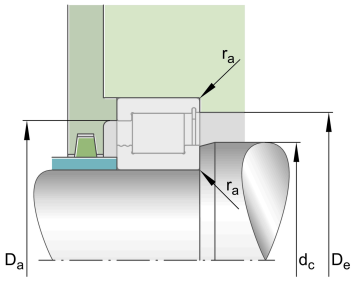



Twoja aktualna wersja produktu

Design	TB	Bearings with increased axial load capacity
Radial internal clearance	C3 (Group 3)	Internal clearance larger than CN
Tolerance class	PN	Normal (ISO 492:2023)
Number of rows	1	Single-row design

Main Dimensions & Performance Data

d	950 mm	Bore diameter
D	1.150 mm	Outside diameter
B	90 mm	Width
C_r	2.550.000 N	Basic dynamic load rating, radial
C_{0r}	6.300.000 N	Basic static load rating, radial
C_{ur}	475.000 N	Fatigue load limit, radial
n_G	280 1/min	Limiting speed
$n_{\vartheta r}$	146 1/min	Reference speed
≈m	182,4 kg	Masa

Karta katalogowa jest jedynie przeglądem wymiarów i podstawowych nośności wybranego produktu. Zawsze należy stosować się do wszystkich dalszych informacji i instrukcji dotyczących tego produktu. Na naszej stronie internetowej znajduje się formularz kontaktowy umożliwiający wysłanie zapytania o dalsze informacje

Mounting dimensions

$d_{a\ min}$	1.022 mm	Minimum diameter shaft shoulder
$d_{c\ min}$	1.022 mm	Minimum shaft shoulder
$D_{a\ max}$	1.082 mm	Maximum diameter of housing shoulder
$D_{e\ min}$	1.105 mm	Minimum diameter of housing shoulder
$r_{a\ max}$	5 mm	Maximum recess radius
E	1.105 mm	Raceway diameter outer ring

Dimensions

r_{min}	5 mm	Minimum chamfer dimension
s	11,5 mm	Axial displacement
d_1	1.022 mm	Maximum rib diameter inner ring
$D_{1\ min}$	1.082 mm	Minimum rib diameter outer ring

Temperature range

T_{min}	-30 °C	Operating temperature min.
T_{max}	120 °C	Operating temperature max.

Właściwości

- Obciążenie promieniowe
- Obciążenie osiowe jednokierunkowe
- Smarowanie smarem
- Smarowanie olejem
- Bez uszczelnienia
- Łożysko gabarytowe

Karta katalogowa jest jedynie przeglądem wymiarów i podstawowych nośności wybranego produktu. Zawsze należy stosować się do wszystkich dalszych informacji i instrukcji dotyczących tego produktu. Na naszej stronie internetowej znajduje się formularz kontaktowy umożliwiający wysłanie zapytania o dalsze informacje