




SL181852-E-BR-C3

Cylindrical roller bearing

Cylindrical roller bearing SL1818...-E, full complement roller set, single row, semi-locating bearing, 1 rib on outer ring, 2 ribs on inner ring, type SL18

Informacje techniczne

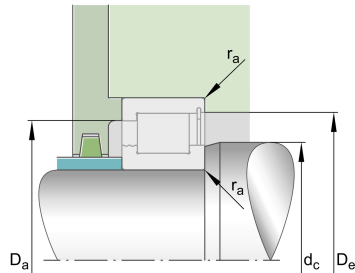

Twoja aktualna wersja produktu

Design	E	
Radial internal clearance	C3 (Group 3)	Internal clearance larger than CN
Tolerance class	PN	Normal (ISO 492:2023)
Number of rows	1	Single-row design

Main Dimensions & Performance Data

d	260 mm	Bore diameter
D	320 mm	Outside diameter
B	28 mm	Width
C _r	275.000 N	Basic dynamic load rating, radial
C _{0r}	530.000 N	Basic static load rating, radial
C _{ur}	58.000 N	Fatigue load limit, radial
n _G	1.080 1/min	Limiting speed
n _{gr}	790 1/min	Reference speed
≈m	4,565 kg	Masa



Mounting dimensions

$d_{a\ min}$	281 mm	Minimum diameter shaft shoulder
$d_{c\ min}$	281 mm	Minimum shaft shoulder
$D_{a\ max}$	301,5 mm	Maximum diameter of housing shoulder
$D_{e\ min}$	308 mm	Minimum diameter of housing shoulder
$r_{a\ max}$	2 mm	Maximum recess radius
E	308 mm	Raceway diameter outer ring

Dimensions

r_{min}	2 mm	Minimum chamfer dimension
s	2 mm	Axial displacement
d_1	281 mm	Maximum rib diameter inner ring
$D_1\ min$	301,5 mm	Minimum rib diameter outer ring

Temperature range

T_{min}	-30 °C	Operating temperature min.
T_{max}	120 °C	Operating temperature max.

Właściwości

- 

Obciążenie promieniowe
- 

Obciążenie osiowe jednokierunkowe
- 

Smarowanie smarem
- 

Smarowanie olejem
- 

Bez uszczelnienia
- 

Łożysko gabarytowe