


GE280-UK-2TS

Spherical plain bearing

Radial spherical plain bearing, maintenance-free, sliding layer: ELGOGLIDE, DIN ISO 12240-1, Tolerances of the outside diameter and bore not according to DIN ISO 12240-1, dimension series E, sealed

Informacje techniczne

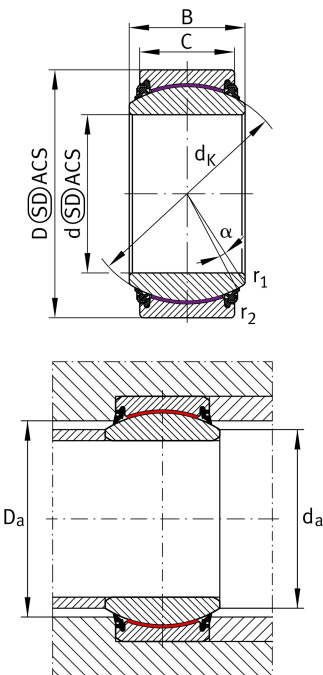

Twoja aktualna wersja produktu

Maintenance	Maintenance free	
Sealing	2TS	Integrated triple lip high performance seals on both sides
Bore lining	Without	
Coating	Without	
Fabric	ELGOGLIDE	
Material	Steel	

Main Dimensions & Performance Data

d	280 mm	Bore diameter bearing
C _r	10.100.000 N	Basic dynamic load rating, radial
D	400 mm	Outside diameter bearing
B	155 mm	Width inner ring
C	120 mm	Width Outer ring
C _{0r}	16.800.000 N	Basic static load rating, radial
m	63,5 kg	Masa

Mounting dimensions

r _{1smin}	1,1 mm	Edge Spacing
r _{2smin}	1,1 mm	Edge Spacing
D _{amin}	342 mm	Housing Connection Diameter
d _{amax}	313,8 mm	Connection measurement, inner ring



Dimensions

d _K	350 mm	Ball diameter
α	6 °	Tilt angle
D _{OT}	0 mm	Outside diameter, upper tolerance
D _{UT}	-0,04 mm	Outside diameter, lower tolerance
B _{OT}	0 mm	Width inner ring, upper tolerance
d _{UT}	-0,035 mm	Bore diameter bearing, lower tolerance
B _{UT}	-0,35 mm	Width inner ring, lower tolerance
d _{OT}	0 mm	Bore diameter bearing, upper tolerance
C _{OT}	0 mm	Width outer ring, upper tolerance
C _{UT}	-0,8 mm	Width outer ring, lower tolerance
G _r	0 - 0,125	Radial Clearance
G _{rmax}	0,125 mm	Radial clearance, maximum
G _{rmin}	0 mm	Radial clearance, minimum

Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	100 °C	Operating temperature max.

Właściwości

	Obciążenie promieniowe
	Obciążenie osiowe jednokierunkowe
	Obciążenie osiowe dwukierunkowe
	Smarowanie dożywotnie, bezobsługowe
	Uszczelnienie dwustronne
	Nieosiowość statyczna
	Nieosiowość dynamiczna